

# (12) UK Patent Application (19) GB (11) 2 070 595 A

(21) Application No 8102541

(22) Date of filing 28 Jan 1981

(30) Priority data

(31) 8004519

(32) 29 Feb 1980

(33) France (FR)

(43) Application published

9 Sep 1981

(51) INT CL<sup>3</sup>

C07C 143/74 A62D 1/04

(52) Domestic classification

C2C 20Y 311 31Y 323

32Y 334 385 51X 53X

620 695 808 80Y AA SJ

A5A 1

(56) Documents cited

GB 1302612

(58) Field of search

C2C

(71) Applicants

PCUK Produits Chimiques

Ugine Kuhlmann, Tour

Manhattan — La Defense

2, 5 & 6 Place de l'Iris,

92400 Courbevoie, France

(72) Inventors

René Bertocchio,

Louis Foulletier,

André Lantz

(74) Agents


Page, White & Farrer, 27

Chancery Lane, London

WC2A 1NT

(54) Amine oxides and fire-extinguishing compositions containing such amine oxides

(57) The amine oxides of the general formula:



wherein

n is an integer from 1 to 10

a is an integer from 2 to 10

p is an integer from 0 to 10

R<sub>1</sub> is either a hydrogen atom or a C<sub>1-6</sub> alkyl radical and

each of R<sub>2</sub> and R<sub>3</sub> independently represent a C<sub>1-6</sub> alkyl radical, are useful as surface-active agents, especially in fire-extinguishing compositions.


GB 2 070 595 A

EV979440244

## SPECIFICATION

## Amine oxides and fire-extinguishing compositions containing such amine oxides

This invention relates to new amine oxides of general formula (I):



5 wherein

$\text{C}_n\text{F}_{2n+1}$  represents a straight or branched perfluorinated chain where  $n$  is an integer from 1 to 20,

$a$  is an integer from 2 to 10,

$p$  is an integer from 0 to 10,


$\text{R}_1$  is either a hydrogen atom or a  $\text{C}_{1-6}$  alkyl radical, and

10  $\text{R}_2$  and  $\text{R}_3$  each independently represent a  $\text{C}_{1-6}$  alkyl radical.

The amine oxides of general formula (I) in which  $a = 2$ ,  $p = 3$ , each of  $\text{R}_2$  and  $\text{R}_3$  is a methyl radical and  $\text{R}_1$  is hydrogen or a methyl radical are particularly interesting. The amine oxides of the invention may be prepared by the conventional methods of preparing amine oxides, for example by reacting the corresponding amines with hydrogen peroxide (cf. for example KIRK OTHMER 3rd edition, vol. 2, p.


15 259—271).

The amines which may be used for preparing the amine oxides according to the invention are compounds of the general formula (II):



20 wherein  $a$ ,  $p$ ,  $n$ ,  $\text{R}_1$ ,  $\text{R}_2$  and  $\text{R}_3$  are each as defined above, have previously been described by us, e.g. in French Patent 2088594. These sulphonamides may constitute valuable raw materials for the production of fluorinated surfactants of the cationic or amphoteric type. Thus, French Patents 2084888, 2088941, 2128028 and 2390426, described the surfactants obtained by quaternising these amines with alkyl halides, i.e. cationic surfactants, and the betaines obtained by quaternising these same

25 amines with halogenocarboxylic acid salts, saturated aliphatic lactones of  $\alpha$ -ethylene acids. The following three formulae show characteristic examples of these different products:

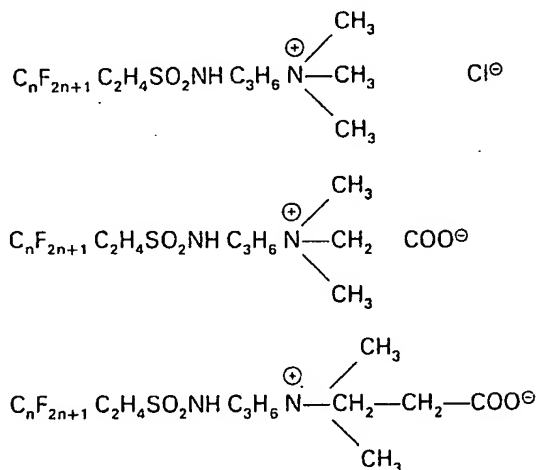

30 These fluorinated surfactants will substantially reduce the surface tension of aqueous solutions and can thus be used as wetting agents, foaming agents, emulsifiers or dispersants. Owing to the substantial reduction in surface tension which they bring about in water, these products have also been used for the production of surface-active compositions for use as bases in the production of extinguishing compounds intended for combating hydrocarbon fires.

35 The applicant has found that the amine oxides according to the invention have significantly better surface-active properties than the cationic or amphoteric products mentioned hereinbefore. These

differences are illustrated by the results of measurements of the reduction in the surface tension of aqueous solutions as shown in Table I.

TABLE I

No.	Fluorinated Product	Surface tensions of aqueous solutions containing 0.1% of fluorinated products in dynes/cm at 20°C
1	$\text{C}_6\text{F}_{13}\text{C}_2\text{H}_4\text{SO}_2\text{NHC}_3\text{H}_6\text{N}^+(\text{CH}_3)_3 \text{Cl}^-$	27
2	$\text{C}_6\text{F}_{13}\text{C}_2\text{H}_4\text{SO}_2\text{NHC}_3\text{H}_6\text{N}^+(\text{CH}_3)_2\text{CH}_2\text{COO}^-$	17
3	$\text{C}_6\text{F}_{13}\text{C}_2\text{H}_4\text{SO}_2\text{NHC}_3\text{H}_6\text{N}^+(\text{CH}_3)_2\text{CH}_2\text{CH}_2\text{COO}^-$	17
4	$\text{C}_6\text{F}_{13}\text{C}_2\text{H}_4\text{SO}_2\text{N}(\text{CH}_3)\text{C}_3\text{H}_6\text{N}^+(\text{CH}_3)_2\text{CH}_2\text{COO}^-$	16.8
5	$\text{C}_6\text{F}_{13}\text{C}_2\text{H}_4\text{SO}_2\text{NHC}_3\text{H}_6\text{N}(\text{CH}_3)\text{O}$	13.4

The good surface-active properties of the amine oxides according to the invention can also be demonstrated by their ability to form a film on the surface of a hydrocarbon when an aqueous solution of surfactant is placed on the hydrocarbon. From French Patents 1405794 and 2009827, it is known that the aqueous solutions of surfactants which form a film on the surface of hydrocarbons can be used as extinguishing agents. The film-forming power of an aqueous surfactant solution is related to its surface tension  $\gamma_B$ , the surface tension of the hydrocarbon  $\gamma_A$  and the interface tension  $\gamma_{AB}$  between the two media by the equation


$$S = \gamma_A - (\gamma_B + \gamma_{AB})$$

The higher the positive value of the coefficient of spreading S, the better is the film-forming power. Thus, aqueous surfactant solutions having low surface tension and low interface tension relative to the hydrocarbon will spread better.

The efficacy of a film-forming extinguishing agent depends particularly on the speed of spreading of the film. This can be evaluated by measuring the time taken by a certain volume of surface-active solution to cover entirely a certain surface area of hydrocarbon. The speed of spreading can be determined by the following method:

A glass dish 120 mm in diameter is half-filled with the reference hydrocarbon. 0.1 cm<sup>3</sup> of the surfactant solution is placed in the centre of the hydrocarbon layer. The difference in reflecting power






and three parts of non-ionic surfactant sold under the trade mark TRITON X 100 (ethoxylated octylphenol with 10 ethylene oxide groups made by Messrs. ROHM & HAAS).

TABLE III

Concentration of fluorinated surfactant expressed in mg fluorine / 100 cm <sup>3</sup>	Fresh water solution		Sea water solution	
	Cyclohexane	Petrol F	Cyclohexane	Petrol F
86	3.5	5	1.5	2.5
69	3	10	1.5	2.5
52	5	19	2	3.5
54	9	p	4	9.5
17	p	—	p	p

5 At a concentration of 86 mg of fluorine per 100 cm<sup>3</sup> of solution, the above composition based on product no. 3 of Table I forms a film on hexane, but this film only spreads partially. 5

This considerable improvement in the spreading properties by the addition of a non-fluorinated surfactant is also true in the case of the amine oxides according to the invention and even under these conditions the film-forming properties of the amine oxides are very superior to those of the fluorinated 10 surfactants mentioned hereinbefore. Thus, an aqueous composition consisting of: 10



and 3 parts of Triton X 100 gave the spreading results shown in Table IV.

TABLE IV

Concentration of fluorinated surfactant expressed in mg fluorine / 100 cm <sup>3</sup>	Freshwater solution		Sea water solution	
	Cyclohexane	Petrol F	Cyclohexane	Petrol F
86	1	1	1.5	1.5
69	1	1	1.5	1.5
52	1	1.5	2	2
34	1.5	1.5	4	4
17	11.5	11	15	10

A comparison of Tables III and IV confirms the superiority of the amine oxides according to the invention, particularly as the last composition containing the amine oxide and the non-ionic surfactant spreads completely over hexane at a concentration of 86 mg of fluorine per 100 cm<sup>3</sup> in 7.5 seconds in a fresh water medium and in 23 seconds in a sea water medium. The identical composition using the amphoteric surfactant no. 3 of Table I instead of the amine oxide does not give total spreading over hexane at the same concentration.

The superiority of the amine oxides over these amphoteric derivatives is all the more remarkable because the latter products can already be regarded as fluorinated surfactants which produce excellent extinguishing agents. The industrial product "Light Water FC 203" made by MINNESOTA MINING & MANUFACTURING CO., which is probably one of the compositions most widely used in this field, has, for example, with the same fluorine content, film-forming properties which are slightly less good than those of the amphoteric derivative combined with Triton X 100. On the other hand, its spreading results (Table V) are very significantly inferior to those of the amine oxides (Table IV).

TABLE V


Concentration of of FC203 expressed in mg fluorine/100 cm <sup>3</sup>	Fresh water solution		Sea water solution	
	Cyclohexane	Petrol F	Cyclohexane	Petrol F
86	5.5	6.5	5	8.5
69	6.5	11.5	7	11
52	17	27.5	13	19
34	p	p	35	50
17	—	—	p	p

The amine oxides according to the invention can therefore be used in the field of extinguishing agents of the AFFF type ("Aqueous Foam Forming Film"), particularly in combination with other fluorinated or non-fluorinated surfactants. The concentrate for the extinguisher may also contain other known additives such as foaming agents (hydrocarbonated surfactants), anti-freeze, solvents and foam stabilisers, chelating agents, corrosion inhibitors and electrolytes. The foam-generating component may also be made up of protein hydrolysates, since these new surfactants are particularly compatible with protein emulsifiers, owing to their chemical nature.


The following Examples further illustrate the invention.

## EXAMPLE 1

100 g of 70% hydrogen peroxide are placed in a reactor containing 512 g of



500 g of 95% ethanol and 200 g of water, with stirring, at 35°C. The mixture is then kept at this temperature, with stirring, for 24 minutes. Then 1 g of active charcoal is added and the mixture is refluxed for two hours. The mixture is then filtered, and by evaporation *in vacuo*, yields 547 g of a white solid which melts, with decomposition, at 135 to 138°C. The solid is identified by mass spectrometry, infra-red spectrometry and by nuclear magnetic resonance as being the hydrated amine oxide of formula:



By chemical titration, i.e. by titrating this product with hydrochloric acid before and after

conversion of the residual amine into quaternary ammonium salt by reacting with methyl iodide, the following values were obtained:


content of unconverted tertiary amine	:	<1%
content of amine oxide	:	88.5%

5 The surface tensions of aqueous solutions of this product are as follows at 20°C: 5


1,000 ppm of amine oxide	:	13.4 dynes/cm
100 ppm of amine oxide	:	13.4 dynes/cm
10 ppm of amine oxide	:	29 dynes/cm

The good spreading properties of this amine oxide are illustrated above in Tables II and IV.

10 EXAMPLE 2 10  
Following the same method as that described in Example 1, but using:



50 g of 95% ethanol, 20 g of water and 20 g of 70%  $\text{H}_2\text{O}_2$ , 66 g of hydrated amine oxide of the formula



15 were obtained, titrating, by chemical analysis as 1% of unconverted residual amine and 85% of amine oxide. 15


The surface tensions of aqueous solutions of this product, at 20°C, are as follows:

1,000 ppm of amine oxide	:	17 dynes/cm
100 ppm of amine oxide	:	21.9 dynes/cm
10 ppm of amine oxide	:	24.8 dynes/cm


20 20

### EXAMPLE 3

Following the method of Example 1, but using:



50 g of 95% ethanol, 20 g of water, and 10 g of 70%  $\text{H}_2\text{O}_2$ , 57 g of hydrated amine oxide of the formula



25 25

were obtained.

The surface tensions of aqueous solutions of this product at 20°C are as follows:

1,000 ppm of amine oxide : 16.3 dynes/cm.

100 ppm of amine oxide : 16.3 dynes/cm.

This product, in admixture with TRITON X 100 (3 parts TRITON X 100 to 1 part amine oxide), was tested as an extinguishing formulation, using the spreading test described above.

5 The results obtained are shown in Table VI.


TABLE VI

Concentration of amine oxide, expressed as mg of fluorine / 100 cm <sup>3</sup>	Fresh water solution		Sea water solution	
	Cyclohexane	Petrol F	Cyclohexane	Petrol F
86	1	1.5	1	1
69	1	2	1	1
52	1	2	1.5	1
34	2	4.5	2.5	2.5
17	15	p	14	17

#### EXAMPLE 4

Using the method described in Example 1, 50 g of 95% ethanol, 20 g of water, 10 g of 70% H<sub>2</sub>O<sub>2</sub>, and 57 g of

10



10

were reacted.

The sulphamidiamine used for this test is a mixture of different homologues, in which the fluorinated chain R<sub>F</sub> contains 4 to 14 carbon atoms. The composition, by weight, of the product used was as follows:

15

C <sub>4</sub> F <sub>9</sub> derivate	1%
C <sub>6</sub> F <sub>13</sub> derivate	50
C <sub>8</sub> F <sub>17</sub> derivate	31
C <sub>10</sub> F <sub>21</sub> derivate	10
C <sub>12</sub> F <sub>25</sub> derivate	4
C <sub>14</sub> F <sub>29</sub> derivate	2


15

20

20

and the average molecular weight was 570.

In this way, 61 g of a white solid were obtained, identified as being the hydrated amine oxide of formula:



25 and titrating, by analysis, 82% of amine oxide. The free amine content was 1.6%. The surface tensions of the aqueous solutions of this product are as follows, at 20°C: 25

1,000 ppm : 17 dynes/cm  
 100 ppm : 21.9 dynes/cm  
 10 ppm : 24.8 dynes/cm


The results of the spreading speed test described above for a mixture of 1 part of amine oxide and 5 3 parts of TRITON X 100 are given in Table VII.

TABLE VII

Concentration of amine oxide expressed in mg of fluorine / 100 cm <sup>3</sup>	Fresh water solution		Sea water solution	
	Cyclohexane	Petrol F	Cyclohexane	Petrol F
84	2	4	4.5	7
69	3	4.5	7.5	9
52	4	7.5	10.5	13.5
34	7.5	12.5	26.5	29
17	p	p	p	p

## CLAIMS

1. An amine oxide of the general formula:



10 wherein:

n is an integer from 1 to 10

a is an integer from 2 to 10


p is an integer from 0 to 10

R<sub>1</sub> is either a hydrogen atom or a C<sub>1-6</sub> alkyl radical and

15 each of R<sub>2</sub> and R<sub>3</sub> independently represent a C<sub>1-6</sub> alkyl radical.


2. An amine oxide according to Claim 1, wherein a is 2, p is 3, R<sub>1</sub> is a hydrogen atom or a methyl radical and each of R<sub>2</sub> and R<sub>3</sub> is a methyl radical.

3. An amine oxide of formula:




20

4. An amine oxide of formula:



20

5. An amine oxide of formula:

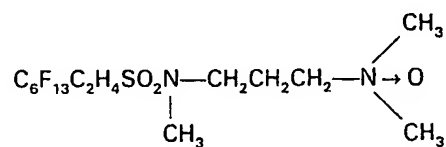

6. An amine oxide of general formula (I) substantially as hereinbefore described in Example 4.
7. A surfactant composition incorporating an amine oxide as claimed in any one of the preceding claims.
- 5 8. A fire-extinguishing composition incorporating an amine-oxide as claimed in any one of the preceding claims. 5
9. A fire-extinguishing composition according to Claim 8, which also includes a fluorinated or non-fluorinated surface-active agent.
- 10 10. Use of an amine oxide according to any one of Claims 1 to 6 as surface active agents. 10
11. Use of an amine oxide according to any one of Claims 1 to 6 as surface active agents in extinguishing compositions.
12. Use of an amine oxide according to any one of Claims 1 to 6, in conjunction with other fluorinated or non-fluorinated surface active agents, as surface active agents in extinguishing compositions.